AN IPSUMM COMPANY

HUDSON

SB-25E

Minimal Beam Deflection

Rebuilt to strict standards

Upgraded Electronics Package

7” Touchscreen

Enhanced Safety System





SB-25E


The SB-25E is an orginal SB-25 rebuilt by skilled ENTAKT technicians. (Hudson service provider) A newly designed electrical control system is added to all presses to improve the reliability, safety and ease of use.


A 7" HMI touchscreen provides simplified operator controls for setting die height and daylight. A protected technician's screen provides access to testing various functions of the machine.

The USM/SAMCO SB series are noted for their robust swing beams mounted on a stationary column by two special bushes. This produces minimal deflection of the swing beam during cutting and permits easy, fast and accurate beam positioning due to low swing force requirements

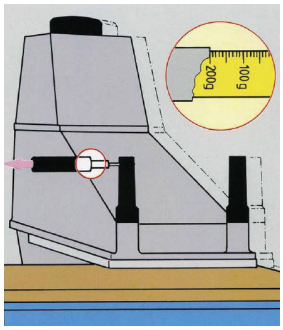

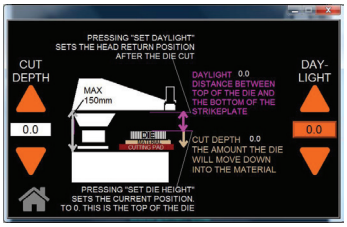


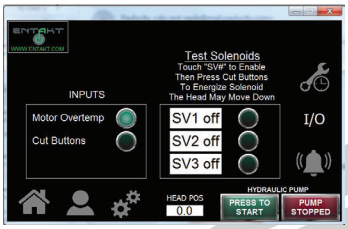


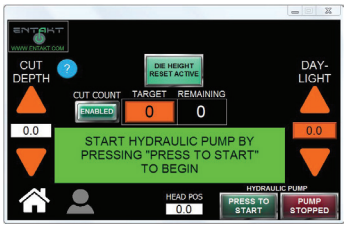






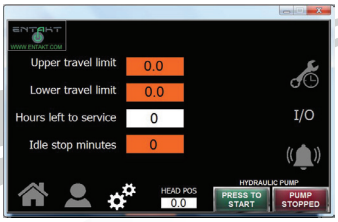

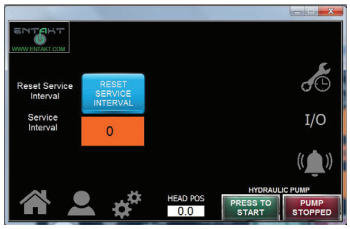

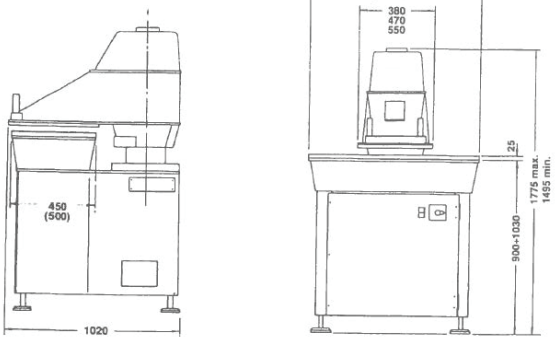

Cutting Force:	**25 Tons (27 US Tons)**	**Oil: 14.2 US Gal (57 Litres))**	
Bed Size:	**39.4" X 19.7"**	**Weight (without oil):**	**1763 lbs**
Swing Beam Width:	**21.6"**	**On Pallet:**	
Working Height:	**39.4"**	**Height:**	**69"**
Cutting Stroke Maximum:	**5.9"**	**Width:**	**43.5"**
Cutting Stroke Minimum:	**0.3"**	**Depth:**	**45.5"**
Daylight (without cutting pad)		**Weight (without oil):**	**1918 lbs**
Maximum:	**7.0"**		
Minimum:	**1.2"**		
Cutting Pad:	**39.4" X 19.7" X 1" white**		
Electrical Supply:	**220V/3ph/60cycle**		

AN IPSUMM COMPANY
HUDSON

Hudson Cutting Solutions
8810 Place Ray-Lawson
Anjou (Quebec),
Canada H1J 1Z2

T: +1 (888) 210-1655
F: +1 (514) 355-5953
www.hudsoncutting.com